


Selectronic ProFet Preamp

L'UNIVERS ELECTRONIQUE

To perfectly match our **ProFet** amplifier, we have designed this preamp with a purely balanced architecture from input to output. This ensures the highest degree of noise immunity and the best signal quality possible, for the ultimate audiophile system.

- 100% pure symmetrical (balanced) architecture preamplifier
- **Selectronic** exclusive FET Technology
- Same look-out and dimensions as **ProFet** amplifier
- Distinct Right and Left channel power supplies
- Fully discrete components technology with matched FET transistors
- ALPS potentiometers, BLACKGATE capacitors, NEUTRIK XLR and silver plated / teflon RCA connectors, etc
- I/O switching by silver plated contacts audiophile relays

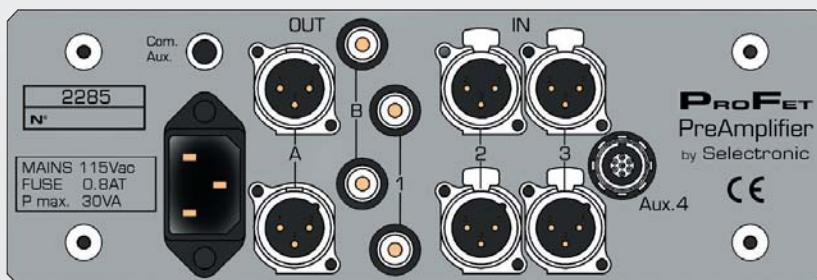

Remark :
It is easy to transform a balanced input (XLR) to unbalanced (RCA) by using our balanced-to-unbalanced adapters.

Our **ProFet** preamp is available under 2 versions :

STANDARD version :

- 2 balanced inputs (XLR)
- 1 unbalanced input (RCA)
- Selection of input by rotary switch
- 1 balanced output + 1 unbalanced output (RCA) (for bi-amping, recording, etc)
- Saturation level of input : 20 V RMS / 600Ω
- Adjustable output level : from -60 dB to +9dB
- Bandwidth : 1 Hz à 300 kHz
- THD + noise : < 0.0015 %
- Dimensions : 8.9"Wx 3.5"Hx 13.4" D (226x90x340mm)
- Net Weight : 14 lbs (6.4kg)

R/C version

Same features as standard version except :

- Input choice by push buttons on front panel or from the R/C unit
- Functions activated from the R/C unit : Input / Volume / Mute / Standby
- Auxiliary balanced input (**Selectronic** RIAA preamp for example)
- Auxiliary output for ON/OFF switching of the **ProFet** amplifier



The **ProFet** preamplifier is covered by a Two (2) Year Limited Warranty

Selectronic
L'UNIVERS ELECTRONIQUE

BP 10050

- 59891 LILLE Cedex 9
- FRANCE

• Téléphone : (0) 328.550.328

• Fax : (0) 328.550.329

www.selectronic.fr